


Typical Application

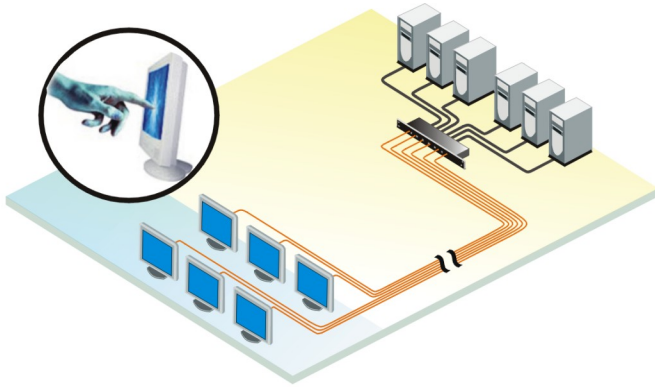

Locate your computer up to 1,000 feet away using standard CAT5 cable

Introduction The XtendVue panel mount and LCD flat panel displays excel in their image quality, rugged design, and versatility. The XtendVue allows you to locate your computer up to 1,000 feet away from the display unit in a safe and secure location. The computer video and optional keyboard, mouse, and stereo audio features are transmitted over the same CAT5 cable. The modular design of the XtendVue offers a variety of mounting options.

Models The XtendVue LCD flat panel display is available in the following models:

- 15" / 17" interactive model with Touchscreen and optional keyboard, mouse, serial, and stereo audio
- 17" Panel mount with Touchscreen and optional keyboard, mouse, serial, and stereo audio

XtendVue has many different applications that can enhance your business presence and provide useful and interactive information for your employees, visitors, and customers. Some of the useful applications are:

Office buildings The XtendVue can be used as a detailed building directory, showing the tenants and their business information.

Company Directory Provide employees an easy way to find information about their benefits, request vacations, and more!

Retail stores Display the in store directory, catalog, and specialty items not normally stocked.

Health Care Provide patients information about health topics, doctor directory by specialty, and visitor information

Virtual Receptionist Install the XtendVue in your business lobby to provide visitors and vendors information about your company, employment, goals, and more.

Part numbers

Model	Description
	15" CAT5 interactive display
	15" CAT5 interactive panel mount display
	17" CAT5 interactive display
	17" CAT5 interactive panel mount display

Specifications

Dimensions	(W)	(D)	(H)
15" Display	14.0"	1.87"	11.45"
17" Display	16.3"	1.87"	13.25"
15" Panel	13.0"	1.75"	10.75"
17" Panel	17.0"	2.00"	15.75"
Display area:	15" / 17" diagonal		
Driver Element	a-Si TFT active matrix		
Display colors	16.7 M (true)		
Resolution	1280 x 1024		
Pixel pitch	0.264mm(H) x 0.254mm(V)		
Contrast ratio	300 (typical)		
Viewing angle	100° (H) / 120° (V)		
Connectors			
Link	RJ45 (CAT5)		
Keyboard	PS/2 (MiniDin6)		
Mouse	PS/2 (MiniDin6)		
Audio	3.5mm audio in/out		
Power	External 12VDC adapter or External 24VDC adapter		



Rearview – display and panel mount models



Convenient front panel controls



Neatly arranged rear panel connectors